

## DS-KD9203-E6

### Face Recognition Door Station with 4.3-inch Screen

104-162



### Key Feature

- 2 MP HD camera with high quality image
- 120 ° wide angle of view
- Up to 5000 faces, and 25000 cards can be added
- Unlocks by cards and faces
- Supports anti-spoofing
- Supports configuration via Web remotely


### Specifications

| System Parameters          |   |
|----------------------------|---|
| Operation Method           | Display screen, physical buttons        |
| Operation System           | Embedded Linux operation system         |
| RAM                        | 1 GB                                    |
| ROM                        | 4 GB                                    |
| Alarm parameters           |   |
| Tampering alarm            | 1                                       |
| Network parameters         |   |
| Network protocol           | TCP/IP, RTSP                            |
| Network interface          | 10/100/1000 Mbps self-adaptive Ethernet |
| Audio parameters           |   |
| Audio input                | Built-in omnidirectional microphone     |
| Audio output               | Built-in loudspeaker                    |
| Audio compression standard | G.711 U, G.711 A                        |
| Audio compression rate     | 64 Kbps                                 |
| Audio quality              | Noise suppression and echo cancellation |

| Audio intercom             | Two-way audio   |
|----------------------------|---|
| General                    |   |
| Power supply               | 12 VDC  |
| Power consumption          | ≤ 13 W  |
| Working temperature        | -30 °C to +60 °C (-22 °F to +140 °F)  |
| Working humidity           | 10% to 90%  |
| Weight                     | 0.995 kg (without package)<br>1.592 kg (with package)                       |
| IP protection level        | IP 65   |
| Installation               | Flush mounting  |
| Material                   | Plastic & glass   |
| Video parameters           |   |
| Video frame rate           | 50 Hz, 60 Hz  |
| Night Vision               | Low illumination, IR supplement lights                                      |
| Video compression Standard | H.264   |
| Wide dynamic range         | True WDR  |
| Camera                     | 2 × 2 MP HD camera  |
| Stream                     | Main stream:<br>1080p@30fps, 720p@30fps<br>Sub stream: VGA@25fps, VGA@30fps |
| Display Parameters         |   |
| Display Screen             | 4.3-inch colorful LCD   |
| Display Resolution         | 800 × 480   |

| Access control Parameters |  |
|---------------------------|--|
| Card type                 | Mifare card  |
| Device interfaces         |  |
| I/O input                 | 4  |
| RS-485                    | 2  |
| Debugging port            | 1  |
| Door control              | 1  |
| Performances              |  |
| Fingerprints capacity     | /  |
| Card capacity             | Max. 25000   |
| User capacity             | Max. 10000   |
| Face capacity             | Max. 5000  |
| Linked indoor station     | Max. 500   |
| Linked sub door station   | Max. 8   |
| Protocol                  | ISAPI, RTSP, SNMPv1,v2,v3  |
| Unlock door               | Unlock by presenting cards, unlock by face, unlock via Client Software, unlock by indoor station |
| Face anti-spoofing        | Support  |
| Face recognition distance | 2 m  |
| Face recognition time     | ≤ 0.2 s  |

**Dimensions**

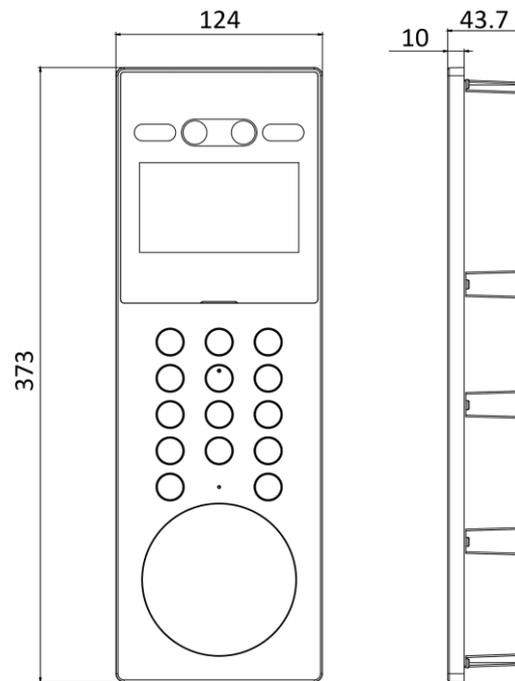

Unit : mm

**ORDERING INFORMATION**

104-162 Hikvision DS-KD9203-E6 Face Recognition Door Stn



Innovative Electronic Solutions  
www.ness.com.au



NSW Ph 02 8825 9222 sales@ness.com.au | VIC Ph 03 9875 6400 nessmelb@ness.com.au | QLD Ph 07 3399 4910 nessbris@ness.com.au | WA Ph 08 9328 2511 nessper@ness.com.au | SA Ph 08 8152 0000 adelaide@ness.com.au