

DS-D60C-B
Digital Signage Player

104-204B




- Variable Materials Supports static and dynamic materials, including the application, pictures, audio, video, PDF, streaming media, webpage, live video, third-party data, etc.
- Flexible Program Schedule Supports free schedule and district display of multiple materials. Supports variable display modes: display by day, display by week, custom display, etc.
- Centralized Management Remotely control and manage one or more screens, such as timed startup/shutdown, timed brightness/volume, and screenshot previewing.
- Organization Feature 5-level organization is available for managing materials, programs, terminals, and users.
- Multilevel User Permission Supports creating custom users, and allocating permission for users according to user level.
- Multiple Security Safeguards 3-level check of materials, programs, and schedules to prevent mistake release. Screensaver to secure safe for broadcast contents. Encryption of data storage and transmission to avoid data tampering.
- Arbitrary Direction Remote Control The remote control, adopting wireless communication in 433 MHz, can control the information distribution box in arbitrary direction.

▪ Specification

Default Parameters	
Material	DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, FLV, WEBM, WMV, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG
Cabinet	
Resolution	1920 × 1080@30 Hz, 1920 × 1080@50 Hz, 1920 × 1080@60 Hz, 1280 × 720@30 Hz, 1280 × 720@50 Hz, 1280 × 720@60 Hz, 3840 × 2160@30 Hz, 3840 × 2160@50 Hz, 3840 × 2160@60 Hz
Built-in System	
Operation System	Android 8.1.0
CPU	Cortex-A17, 4-core, main frequency 1.6 GHZ
Memory	2 GB
Storage	16 GB (EMMC)
Interface	
Video & Audio Input	AUDIO IN × 1
Video & Audio Output	AUDIO OUT × 1, HDMI OUT × 1
Network Interface	LAN × 1, Wi-Fi
Data Transmission Interface	USB 2.0 × 2, Bluetooth 4.0
Power	
Power Supply	12 VAC, 2 A
Standby Consumption	≤ 1 W
Working Environment	
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
General	
Product Dimensions (W × H × D)	145 mm × 145 mm × 31.89 mm (5.7" × 5.7" × 1.3")
Working humidity	10 % to 90 %
Package Dimensions (W × H × D)	188 mm × 176 mm × 101 mm (7.4" × 6.9" × 4.0")
Net Weight	0.6 kg (1.3 lb.)
Gross Weight	0.65 kg (1.4 lb.)
Packing List	Power Adaptor × 1, Remote Control × 1

▪ Dimension

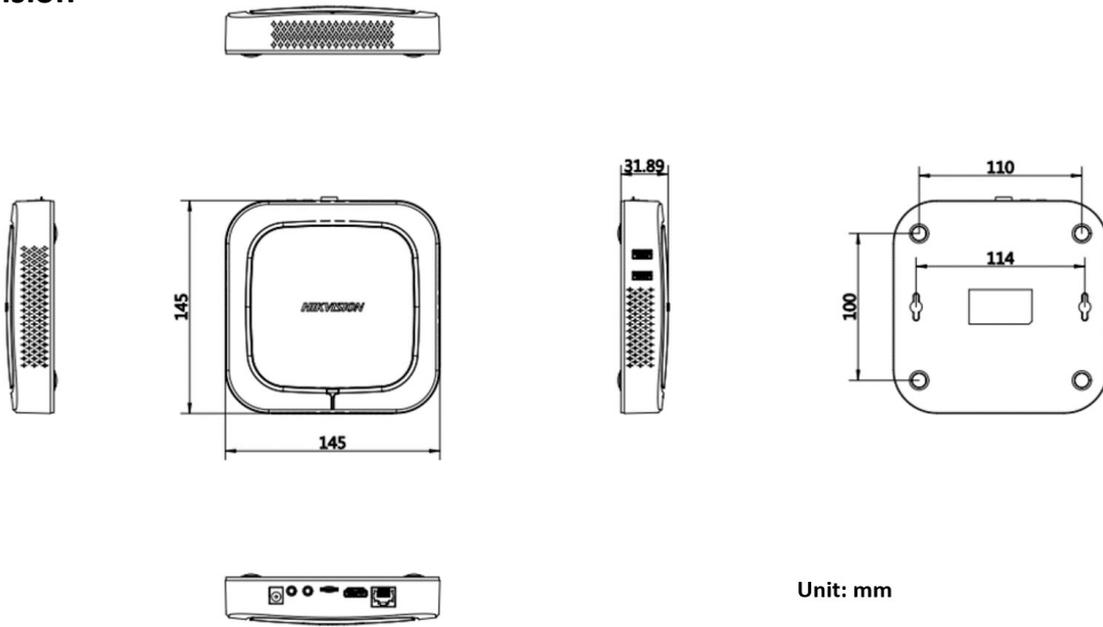

ORDERING INFORMATION

104-204B Hikvision DS-D60C-B Digital Signage Box



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au