

DS-KH8350-WTE1
Video Intercom Indoor Station

104-932




Key Feature

- Premium tempered glass.
- Aerospace-grade aluminum.
- New UI V2.0: User friendly design.
- 7-inch colorful IPS capacitive touch screen with resolution 1024 × 600.
- 8.6 mm Ultra-slim design.
- Reddot award 2017 winner.
- Standard PoE.
- Support capture while video calling.
- Remote unlocking via the client software or the mobile client.
- Views live videos of door stations and external cameras.


Specification

Model		DS-KH8350-WTE1
System	Memory	128 MB
	Flash	32 MB
	Operation system	Embedded Linux operation system
Display	Display screen	7-inch colorful IPS LCD
	Display resolution	1024 × 600
	Operation method	Capacitive touch screen, physical button
Audio	Audio input	Built-in omnidirectional microphone
	Audio output	Built-in loudspeaker
	Audio compression standard	G.711 U
	Audio compression rate	64 Kbps
	Audio quality	Noise suppression and echo cancellation
Network	Wired network	10/100 Mbps self-adaptive network
	Wireless network	Wi-Fi 802.11b/g/n
	Network protocol	TCP/IP、 SIP、 RTSP
	Network interface	1 RJ-45 10/100 Mbps self-adaptive
	Alarm input	8-ch alarm inputs
	I/O output	2
	TF card	Max to 32G, SD 2.0 or lower version
General	Power supply	IEEE802.3af, standard PoE
		12 VDC/1 A
	Power supply via detector	12 V, 200 mA
	Power consumption	≤ 7 W
	Working temperature	-10 °C to 55°C (14 °F to 131 °F)
	Working humidity	10% to 90%
	Dimensions (W × H × D)	180 mm × 140 mm × 22.4 mm (7.09" × 5.51" × 0.88")
	Mounting	Surface mounting
Certification	FCC, IC, CE, C-TICK, ROHS, REACH, WEEE, UL, CB, RCM	

Typical Application

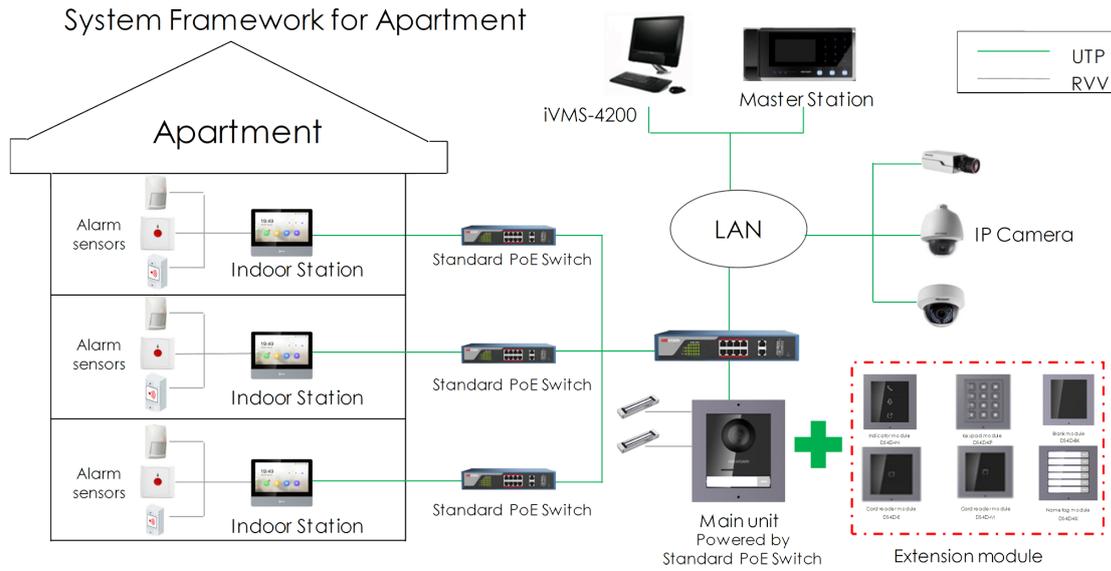

Physical Appearance

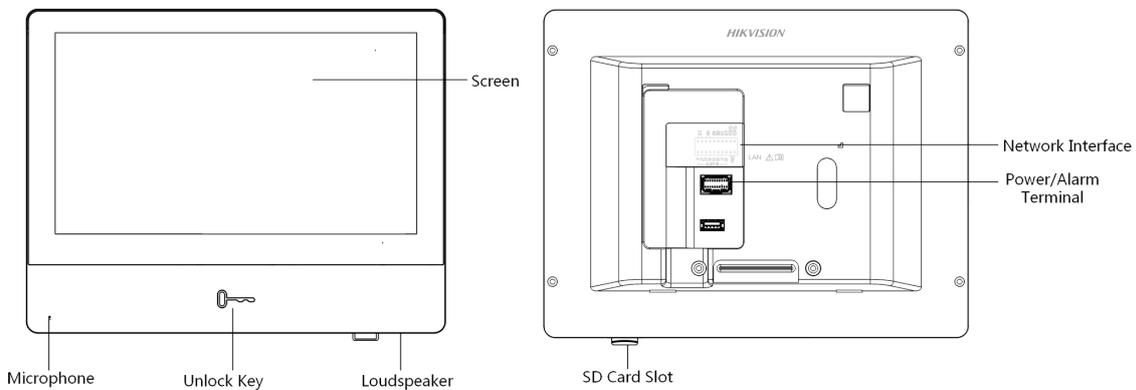

ORDERING INFORMATION

104-932

Hikvision DS-KH8350-WTE1



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au