

## DS-KD9633-WBE6 Video Intercom Face Recognition Door Station

114-460



### Key Feature

- Aluminum frame with anodizing processing and ultra thin fuselage
- 2.5D curved 10.1-inch IPS touch screen
- Higher protection level, IP65 & IK07
- Multiple authentication ways
- Optional sub module

### Specification

System parameters	
Operating system	Android 7.1
ROM	4 GB
RAM	2 GB
CPU	Embedded Processor
Display parameters	
Screen size	10.1-inch
Operation method	Touch screen
Type	Colorful IPS
Resolution	1280 × 800
Video parameters	
Video standard	H.264
Supplement light	Low illumination, IR supplement lights
Lens	Low illumination 2 x 2 MP HD colorful camera
FOV	Horizontal: 88° , Vertical: 44°
WDR	Support
Resolution	2 MP


Audio parameters	
Audio compression standard	G.711 U, G.711 A
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Fingerprint capacity	/
User capacity	20000
Card capacity	100000
Face capacity	10000
Linked indoor station capacity	500
Event capacity	/
Sub door station capacity	16
Network parameters	
Communication protocol	TCP/IP, RTSP
Wired network	10/100/1000 Mbps self-adaptive Ethernet
Wi-Fi	Reserved
Bluetooth	Reserved
3G/4G	/

Authentication	
Card reading frequency	13.56 MHz
Device interfaces	
Alarm input	4 (2 exit buttons and 2 door contacts by default)
TAMPER	1
Network interface	2 RJ45 (1 reserved)
Exit button	2 (1 for lock control and 1 for DS-K2M060 relay control)
RS-485	2 (1 for Hikvision's card reader or elevator controller and 1 for DS-K2M060 by default)
USB	2 for internal use only
Wiegand	/
TF card	1 (reserved)
Alarm output	2 (reserved)
Lock control	2 (1 relay and 1 RS-485 to control the DS-K2M060)
Door contact input	1
Power interface	1
General	
Installation	Surface mounting & flush mounting
Indicator	0
Weight	1.265 kg
Protective level	IP65, IK07
Working temperature	-30° C to 60° C (-22° F to 140° F)
Working humidity	10% to 90%
Dimensions	271 mm × 159.2 mm × 26.5 mm (10.7" × 6.3" × 1")
Battery	/
Power supply	12 VDC, 2 A
Application environment	Outdoor
Power consumption	≤ 18 W

Language

English, French, Portuguese, Brazilian Portuguese, Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovakia, Hebrew, Swedish, Finnish, TraChinese, Mongolian, HongKongTraChinese

### Dimension

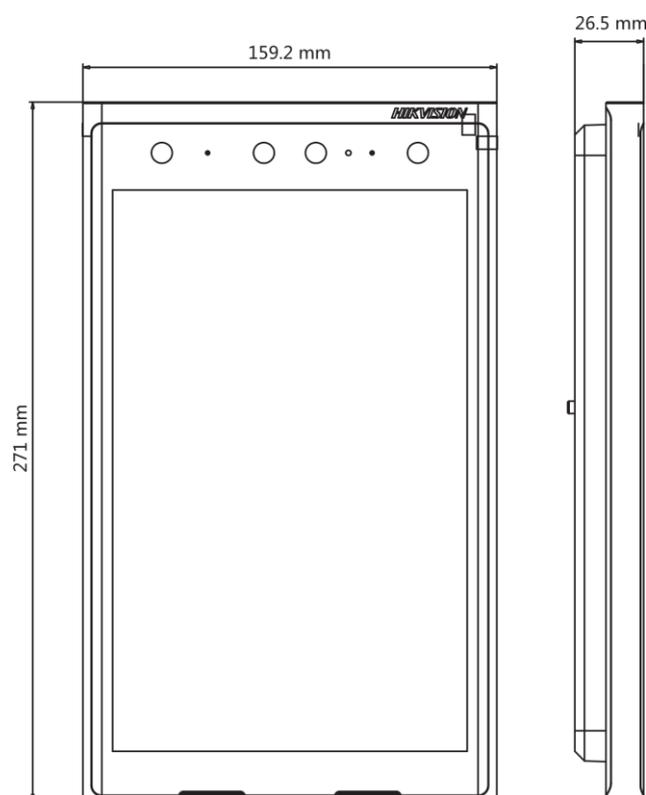

### ORDERING INFORMATION

114-460

Hikvision DS-KD9633-WBE6 Face Recognition Door Station WiFi



Innovative Electronic Solutions  
www.ness.com.au



NSW Ph 02 8825 9222  
sales@ness.com.au

VIC Ph 03 9875 6400  
nessmelb@ness.com.au

QLD Ph 07 3399 4910  
nessbris@ness.com.au

WA Ph 08 9328 2511  
nessper@ness.com.au

SA Ph 08 8152 0000  
adelaide@ness.com.au