




Nessensor

The cost-effective perimeter protection solution

- High/Medium/Low sensitivity adjustable to suit the mounting surface
- Gold Plated contacts for trouble-free operation
- Clip-on protective cover is paintable to blend in with the surroundings
- Compatible with all Ness control panels
- Suitable for most structures including windows, walls, doors

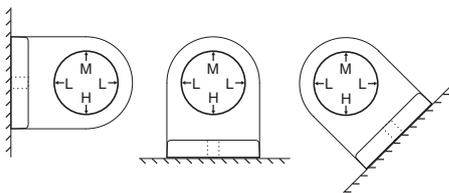

Flexible mounting configuration.
(Sensor must be horizontal on its long axis.)

Nessensor™ MKII Vibration Sensor

Adjustable vibration sensor with gold plated contacts. Proven reliable detection of forced entry through windows, doors, walls, fences etc. Connects directly to the zone inputs on any Ness control panel.

Adjustable sensitivity

All Ness control panels have zone inputs with adjustable sensitivity. In addition to the control panel's sensitivity adjustment, the overall sensitivity of the Nessensor can be adjusted by rotating the body of the Nessensor within its bracket.

Three levels of sensitivity are provided - High, Medium and Low.

Nessensor MKII is supplied with a clip-on protective cover.

Part Number	VIB500
Sensitivity Adjustment	LOW, MEDIUM, HIGH plus Ness control panel sensitivity adjustment
Compatibility	All Ness control panels
Contact type	24CT gold contacts
Connection	N/C contacts Flying leads, 200mm length
Dimensions (L x W x H)	57 x 19 x 20mm Sensor 60 x 22 x 22mm Clip-on cover



Innovative Electronic Solutions

www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au