

DS-9600NI-I16 Series NVR



104-688
DS-9632NI-I16

Available Models

DS-9632NI-I16, DS-9664NI-I16;

Key Features

Professional and Reliable

- Dual-OS design to ensure high reliability of system running
- ANR technology to enhance the storage reliability when the network is disconnected
- HDD hot swap with RAID0, RAID1, RAID5, RAID6 and RAID10 storage scheme configurable
- Either Normal or Hot Spare working mode is configurable to constitute an N+1 hot spare system.

HD Input

- H.265/H.264+/H.264/MPEG4 video formats
- Connectable to the third-party network cameras
- Up to 64 IP cameras can be connected
- Recording at up to 12 MP resolution
- Supports live view, storage, and playback of the connected camera at up to 12 MP resolution

HD Output

- HDMI1/VGA1 and HDMI2/VGA2 outputs provided
- HDMI1 Video output at up to 4K (3840 × 2160) resolution

HD Storage

- Up to 16 SATA interfaces and 1 eSATA interface connectable for recording and backup
- Storage space effectively saved by 50% to 70% with the use of H.264+ decoding format


HD Transmission

- 2 self-adaptive 10M/100M/1000M network interfaces, and two working modes are configurable: multi-address and network fault tolerance

Various Applications

- Centralized management of IP cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- Connectable to smart IP cameras from Hikvision and the recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Instant playback for assigned channel during multi-channel display mode
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- Supports HDD quota and group modes; different capacity can be assigned to different channels

Physical Interfaces

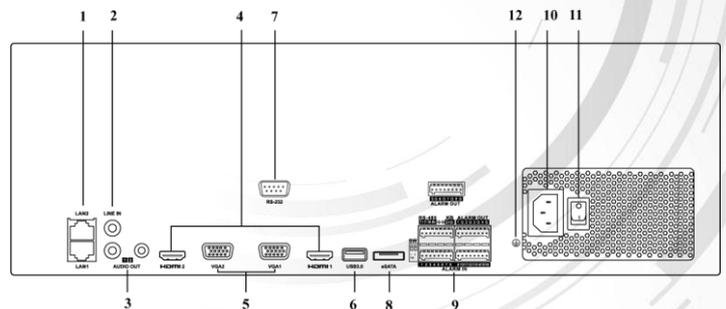

Index	Description
1	LAN1/LAN2 Interface, 2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces provided.
2	LINE IN, RCA connector for audio input.
3	AUDIO OUT, RCA connector for audio output.
4	HDMI1/HDMI2, HDMI video output connector.
5	VGA1/VGA2, DB9 connector for VGA output. Display local video output and menu.
6	USB 3.0 Interface
7	RS-232 Interface
8	eSATA Interface
9	Controller Port, Alarm In/Alarm Out
10	100 to 240 VAC power supply
11	Power Switch
12	GND

DS-9600NI-I16 Series NVR



Specifications

Model		DS-9632NI-I16	
Video/Audio input	IP video input	32-ch	
	Incoming bandwidth	320 Mbps	
	Outgoing bandwidth	256 Mbps, or 200 Mbps (when RAID is enabled)	
Video/Audio output	VGA1 /HDMI1 output resolution	HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI2: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	VGA2 /HDMI2 output resolution	VGA1: 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA2: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	Audio output	2-ch, RCA (Linear, 1 K Ω)	
Decoding	Decoding format	H.265/H.264+/H.264/MPEG4	
	Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF	
	Synchronous playback	16-ch	
	Capability	4-ch @ 4K or 16-ch @ 1080p	
Hard disk	SATA	16 SATA interfaces	
	eSATA	1 eSATA interface	
	Capacity	500GB/1TB/2TB/3TB/4TB/5TB/6TB	
Disk array	Array type	RAID0, RAID1, RAID5, RAID6, RAID10	
VCA	VCA events	IPC uploading supported	
External interface	Two-way audio	1-ch, RCA (2.0 Vp-p, 1 k Ω)	
	Network interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface	
	Serial interface	RS-232; RS-485; Keyboard	
	USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0	
	Alarm in/out	16/8	
General	Power supply	100 to 240 VAC, 50 to 60 Hz	
	Max. Power	300 W	
	Consumption (without hard disk)	≤ 45 W	
	Working temperature	-10 to +55° C (14 to 131° F)	
	Working humidity	10 to 90 %	
	Chassis	19-inch rack-mounted 3U chassis	
	Dimensions (W × D × H)	445 × 496 × 146 mm (17.5 × 19.5 × 5.7")	
Weight (without hard disk)	≤ 12.5 Kg (27.6 lb)		



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au